



Novovierteaguas LX



Edging profile with simple geometry and wide visible side, made of aluminum. It is ideal to finish off balconies, terraces and windowsills. The exclusive design of the eaves, grooved along its length, is more effective to channel the water away from the wall, preventing a run-off on the facade. Angle and joint pieces are available to get a perfect finish.

Applications

Novovierteaguas LX is a profile designed to keep rainwater away from facades to prevent it to cause possible pathologies. The exclusive design of the eaves guarantees its perfect performance.

General Features



*MU201231375

Material: Lacquered aluminum

Length: 8ft2in / 2,5 m.l.

Dimensions: a: 2-15/16" - 75 mm.


Packaging: 10 u./box

Finishes:




156 147

* Utility model

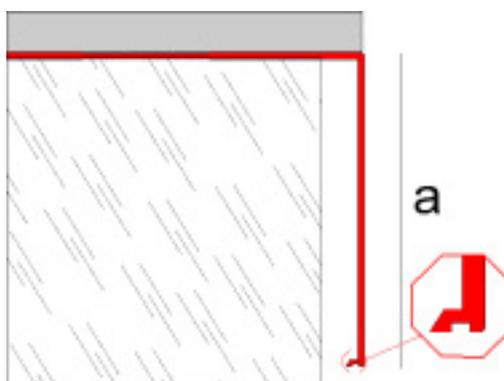

Complementary pieces

Novovierteaguas LX has angle and joint pieces available to install several consecutive profiles. These pieces guarantee the perfect performance of the profile and its perfect finish.



Angle piece



Joint piece

Technical Features

Alloy	6063 (AA y ASTM) L-3441 (UNE 38-301-89)
Fire resistance:	M0 (UNE 23-727-90)
Abrasion resistance:	Very good
Lightfastness:	Excellent
Appearance and color:	EN 12373-1

Materials

Aluminum



Novovierteaguas LX is a profile made by aluminum extrusion. Its has lacquered finishes, oxyde grey and light grey, which have an smooth and high quality surface. The lacquering process has the quality seal Qualicoat, which guarantee the quality of the process and the final results.

Aluminum has excellent chemical, physical and mechanical properties. It is lightweight, tough, ductile, malleable and highly durable

Installation

1. Spread a big amount of mortar on the surface to be tiled.
2. Place the profile and align it with the edge or separately at the desired distance. Then press to make the mortar pass through the holes on the anchoring wing.
3. Place the tile on the anchoring wing and align it with the front part. Press to ensure an optimal adhesion.
5. Finally, clean immediatly the leftover material and let dry.

If you want to install several consecutive profiles, you can use the special joint piece. It is recommended to leave a gap between profiles more or less 5 mm.

For complete installations, angle pieces are available. You have to place it in the corner and then, using the joint pieces, continue with the installation of the profiles leaving a gap of 5 mm. each side.



(*) We recommend **sealing** the joint between the profile and the tiles with silicone or polyurethane mastic to avoid posible leaks or cracks and to absorb the expansions and contractions caused by the exposition to thermal variations.

Cleaning and maintenance

This product will be installed outdoors under weather conditions so the rain water will be a cleaner by itself.

If you prefer cleaning the profile, use water with neutral soap and a soft cloth with no particles to damage the surface.

Technical Information

You can find out more information about the technical features of Emac®'s products by downloading their Technical File from www.emac.es

If you have any query, please contact our Technical Department in tecnico@emac.es

