



* Informative notice


Novorodapie Eclipse®



Novorodapie Eclipse® is a profile made of aluminum to be installed as a skirting in plasterboard or tiled walls. Thanks to its geometry, the profile protects the bottom edge of the wall, generating an innovative hollow effect like if the wall was suspended in the air. Its simple lines, finished with a small curve, create a smooth surface that avoids the accumulation of dirtiness and makes easy the cleaning. In addition to be a skirting, this profile can also be a finish the top of the wall. Optionally a LED strip can be installed in the interior hollow, providing the profile with a double functionality and a high decorative value.

**Promotional atmosphere created using Novorodapie Eclipse® Aluminium matt silver and off-white, showing a suggestion for one possible use of this product. EMAC® does not manufacture, sell or supply any LED strip whatsoever with the Novorodapie Eclipse® product. The choice of LED strip should be undertaken by the installer, taking into account the circumstances of the installation site.*

General Features

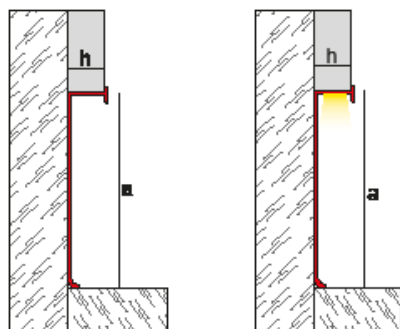


Material: Anodized/lacquered aluminum

Length: 2,5 ml (8.2')

Dimensions: h: 13 mm (1/2") / 15 mm (9/16")
a: 70 mm (2-3/4") / 100 mm (4")

Finishes:



Matt silver



Off white



Matt black

Applications

Novorodapie Eclipse® is a skirting profile made of anodized aluminium, matt silver finish, or lacquered aluminium, off white finish. This skirting has been designed to protect the bottom of plasterboard walls, providing with functionality and a high decorative value. It can also be installed in tiled walls. Easy to install by using adhesives.

Its installation must lie flush with the wall, therefore it is recommended for installations where a perimetral joint is not required.

Technical features

Alloy: 6063 - T5


Fire resistance: M0 (UNE 23-727-90)

Abrasion resistance: High

Lightfastness: Excellent

Appearance and color: EN 12373-1

Complementary pieces



Novorodapie Eclipse® has a special cover available to get a perfect installation.

Materials



Novorodapie Eclipse® is a profile made by extrusion of aluminum. The anodizing process improves the corrosion resistance, mechanical resistance and appearance of profiles. It has the quality seal Qualanod, which guarantees the quality of the process and the resulting profiles. This seal regulates several tests: appearance and color, thickness measurements, sealing and impregnation control, abrasion resistance, lightfastness, acetic saline chamber and nitric acid immersion.

The lacquered finishes have a high quality and homogeneous surface. The lacquering has the quality seal Qualicoat, which guarantees the quality of the process and the final products.

The aluminum has excellent chemical, physical and mechanical properties. It is lightweight, tough, ductile, malleable and highly durable

Installation

Novorodapie Eclipse® is an easy-to-install profile. It can be installed before or after the work.

1. Install the plasterboards on the walls leaving a space on the bottom to install the skirting.
2. Apply mounting adhesive or polyurethane mastic on the rear of the profile.
3. Place the profile and press it firmly to ensure an optimal adhesion
4. Remove the possible leftover adhesive and let dry

You can also begin installing the profile and then continue installing the plasterboard panels.

Cleaning and maintenance

The product must be cleaned periodically with a soft cloth. If you use a neutral liquid cleaner, you must rinse the profile with cold water and dry it to remove the humidity excess. The persistent dirtiness can be removed by using cleaning approved agents lightly abrasive or a grid covered with polished powder neutral.

Steel wool, abrasive cleaners, souring products as well as strong acids (hydrochloric and perchloric), strong bases (caustic soda or ammonia) or carbonated solutions are not recommended. Citric acid is neither recommended because dissolves the protective layer of the surface of aluminium. Waxes, petrolatum, lanolin or similar substances are not appropriate. Solvents containing haloalkanes (hydrofluoroether and chlorinated solvents) and curing accelerators containing chlorides should not be used (use special accelerators free of chlorides).

Technical information

You can find out more information about the technical features of EMAC®'s products by downloading its Technical File in www.emac.es.

If you have any query, please contact our Technical Department in tecnico@emac.es.



Outdoors



Indoors



Wall tiling



Recyclable

Emac Complementos S.L. (Spain) info@emac.es // Emac America L.L.C. (FL,USA) info@emac-america.com // Emac Italia S.R.L. (Italy) info@emac-italia.it

www.emac.es

*The data provided are for information only and have been obtained by our collaborators or Emac®.
Does not constitute legal guarantee in terms of properties and / or functionality of the application of material*