



Novotop Access Zinc-plated steel



The Novotop tactile nails provide a warning solution to identify areas with obstacles, or areas where there is a change of level or an unprotected gap, such as stairs and open platforms. Made of zinc-plated steel, are ideal for outdoor and indoor places, and have tactile and anti-slip designed texture, so they are easily identified by users. Its **exclusive installation**, with no adhesives, allows an important saving cost. They can be installed by using the fitting template (in option).


General Features

Material: Zinc-plated steel

Nail diameter (a): 25 mm

Nail height (h): 5 mm

Insert height (b): 17,5 mm



Reference	Packaging	Color
NTOPACM	Bag 250 u	Zinc-plated steel
NTOPACM1	Units	
NTOPACNM	Bag 250 u	Zinc-plated steel black
NTOPACNM1	Units	

Applications

Novotop Access Steel are tactile nails designed to be installed, according to a template, as a warning element of the risk posed by train platforms, walkways, beginning and end of staircases, among others, mainly for the blind or the visual disabled. You can easily install them by using the fitting template (optional).

The Novotop Access Steel nails, when installed in staircases, serve as a tactile signaling element due to its height (5 mm). The Novotop Steel are suitable to be installed outdoors.

Materials

The Novotop Access steel are made of zinc-plated steel, which is a metal with excellent properties. The nails are protected through an electrolytic or mechanic process in which they are covered with a zinc bath. This increases its resistance to corrosion and oxidation and improves its visual appearance.

The steel is a very common metal used in everyday objects, tools, appliances, building structures... It is also very used in less common areas such as infrastructures building, automotive or maritime industries among others.

Technical Features and Test




Salt spray test	400 h with no change
-----------------	----------------------

Slip resistance by friction pendulum method. Wet testing. Pedestrian surfaces. UNE 41901:2017 EX Standard	50 Class 3
--	---------------

Installation

Novotop Access Steel is easy to install by drilling the floor and using adhesives. The fitting template, available in option, can help in the installation (it is recommendable). **The template with dimensions, 595x420 mm, has been designed to install 88 Novotop.**

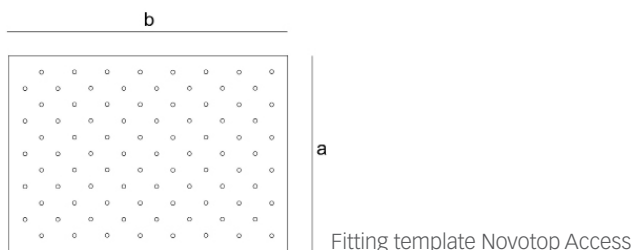

1. Clean the area to install Novotop Access
2. Place the fitting template on the ground and make three shallow holes in three of the edges of the template. Then clean the dust and insert the steel pins supplied to ensure the fixation of the template to the ground.
2. Make drills 10 mm diameter matching the center of the holes on the template. It is important to maintain the drill machine vertical all time.
3. Remove the pins and the template. Deepen the first holes you made (for the pins) and clean the leftover.
4. Install Novotop Access in the drilled hollows. Insert the nail on the hollow and hit it with a nylon or rubber hammer. Do not use a metallic hammer.

The innovative design of Novotop Access steel, allows a simple installation with important saving in costs. This is very important when creating accesible paths that usually have a lot of pieces.

Cleaning and maintenance

Novotop Access zinc-plated steel do not require special maintenance. It will be enough using water with a neutral cleaner diluted. Outdoors rain will act as a natural cleaner.

It is not recommended using steel wool, abrasive cleaners, souring products, strong acids (hydrochloric and perchloric), strong bases (caustic soda or ammonia) or carbonated solutions.

TECHNICAL DATA SHEET

Novo**top Access** Zinc-plated steel

Technical information

You can find out more information about the technical features of the Emac[®]'s products by downloading its Technical Files in **www.emac.es**.

If you have any query, please contact our Technical Department in **tecnico@emac.es**.



Outdoors



Indoors



Flooring

Emac Complementos S.L. (Spain) info@emac.es // Emac America L.L.C. (FL,USA) info@emac-america.com // Emac Italia S.R.L. (Italy) info@emac-italia.it
www.emac.es

The data provided are for information only and have been obtained by our supplier or Emac[®].
Does not constitute legal guarantee in terms of properties and / or functionality of the application of material